

EYEONYOU
BY ENFOTRACE



GPS SECURITY FOR YOUR VEHICLE

ENFOTRACE PRESENTS **EYEONYOU**, ITS COMMERCIAL-GRADE INDUSTRY LEADING GPS TRACKING DEVICE. PROTECT YOUR VEHICLE ASSETS AND YOUR FAMILY; KEEP AN EYE ON WHAT MATTERS MOST WITH OUR **EYEONYOU** GPS TRACKING DEVICE. OUR MANAGEMENT TEAM HAS DELIVERED SOME OF THE MOST PREMIERE LOCATION BASED SERVICES FOR OVER 15 YEARS. WE HAVE COMBINED THIS EXPERIENCE WITH THE INDUSTRY'S MOST COMPACT AND RELIABLE GPS TRACKING DEVICE SO YOU RECEIVE THE BEST PERFORMING PRODUCT 24/7. **EYEONYOU** IS EASY TO USE, AND FULL FEATURED WITH USER PROGRAMMABLE PERMISSIONS SO THE ENTIRE FAMILY CAN KEEP TRACK OF VEHICLE ACTIVITY. DON'T LET YOUR FAMILY OR VEHICLE GO UNPROTECTED. RECEIVE PEACE OF MIND, WITH **EYEONYOU** GPS.

PRODUCT FEATURES

- BATTERY DISCONNECT NOTIFICATION
- VEHICLE ALARM NOTIFICATION
- TOWING ALARM NOTIFICATION
- DISABLE STARTER FEATURE
- SPEEDING NOTIFICATION
- MULTIPLE GEOFENCING
- QUICK & EASY INSTALL
- UNLOCK YOUR DOORS
- ONE CLICK LOCATE

GPS LOCATION

Sara's Car
210 Freeway
8:45am March 4
90 mph



TRACKING THINGS THAT MOVE.



33 HAMMOND, STE 201
IRVINE, CA 92630

866-298-6333
WWW.ENFOTRACE.COM

EYEONYOU

EYEONYOU
BY ENFOTRACE



33 Hammond, Ste 201
Irvine CA 92618
866-298-6333

PHYSICAL SIZE

SIZE: 2.2" X 2.2" X .43"

WEIGHT: 40 G

INPUTS/OUTPUTS

(2) POSITIVE TRIGGERED INPUTS

(2) NEGATIVE TRIGGERED OUTPUT PORTS

ENVIRONMENTAL


TEMPERATURE: -30 TO +70 C OPERATING

HUMIDITY: 95% NON-CONDENSING

VIBRATION: SAE J1211

ALTITUDE: -400 TO +15,000 METERS

SPLASH-PROOF, DUST PROOF PLASTIC HOUSING

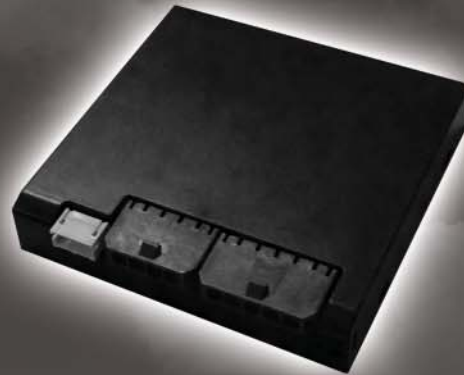

GPS CHARACTERISTICS

GPS RECEIVER - L1 FREQUENCY

52 CHANNEL TRACKING WITH FAST ACQUISITION

ACCURACY WITHIN 10 METERS 95% OF THE TIME

INTERNAL GPS ANTENNA



COMMUNICATIONS

FREQUENCIES 850/900/1800/1900

GPRS MODE: CLASS B

INTERNAL CELLULAR ANTENNA

POWER MANAGEMENT

AT FULL POWER THE EYEONYOU GPS DRAWS .47 WATTS ON AVERAGE AND 35 MILLIAMPERES.

OPERATING VOLTAGE IS 4.8 TO 30VDC OPERATING VOLTAGE.

THE RADIO IS ALWAYS ON SO YOU CAN COMMUNICATE WITH THE UNIT.

2 LEDS VERIFY THE UNIT IS OPERATING NORMALLY.

